

Meet DINO 220XSE

Productivity just got easier.



SOSlocation.ca
VENTE · LOCATION · SERVICE · TRANSPORT
1-833-360-3330

DINOLIFT
UP TO THE JOB

100% up to the job

- 22 m innovative multipurpose boom lift
- XXXL basket with impressive 350 kg capacity
- Material handling capability - 500 kg lifting capacity with forks or lifting hook

Standard features in DINO 220XSE:

- 350 kg basket capacity, XXXL basket 1.3 x 2.4 m **(1)**
- Additional material handling capability – lifting capacity up to 500 kg **(2-3)**
- Full working envelope in all directions with full basket load
- Basket mounted on forks with a safe, lockable quick-release mechanism **(4)**
- Permanent 4WD, 40 % gradeability, oscillating axle
- Fully operational and safely drivable with up to 5 degrees tilt
- Continuous boom rotation and direction sensing driving
- DINO SafeGuard secondary guarding



Options available for DINO 220XSE:

- Hydraulically operated outriggers with automatic levelling - enable working in up to 12° inclination and fast set up **(5)**
- Radio control for perfect visibility all round **(2)**
- Multiple basket and material handling options
- Lifting hook for 500 kg **(3)**
- DINO SkyRack, plate and tube rack
- Basket for materials 1.3 x 1.7 m
- Hydraulic generator 5kW
- Non-marking tyres
- LED driving lights and working lights in basket




Technical data

	220XSE
Max. working height	21.95 m
Max. outreach	13.40 m
Lifting capacity	350 kg/500 kg
Basket size	1.3 x 2.4 m
Boom rotation	cont.
Basket rotation	180°
Jib	1.6 m/150°
Transport length *	8.15 m
Transport width	2.40 m
basket detached	2.33 m
Transport height	2.56 m
Up and over	8.45 m
Weight *	12700 kg
Diesel engine	Deutz 36.3 kW
Max. levelling inclination	5° (12°)
Gradeability (4WD)	40 %
Drive speed	6.0/1.0 km/h
Ground clearance	0.43 m
Wheelbase	2.67 m
Outside turning radius 2WS	5.50 m
Tailswing	0.60 m
Tyres	355/55D625
Hydraulic outriggers	option
Remote R/C	option
Boom construction	Articulated, telescopic boom with jib
Other information	100% differential lock + limited slip Secondary guarding

*) with std specification, basket mounted on forks

Outreach

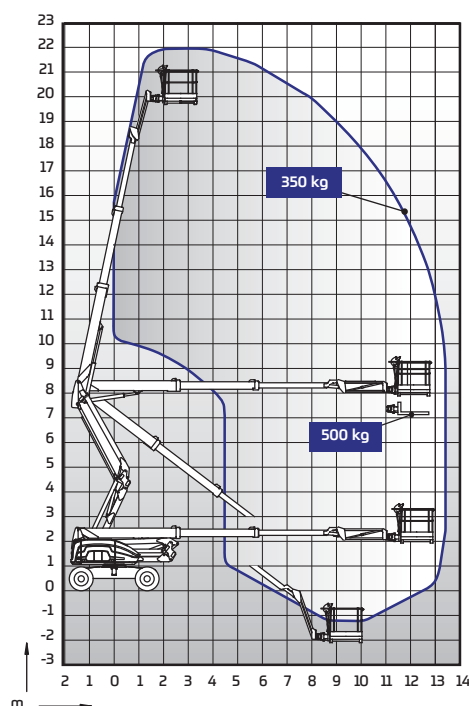

DINOlift Oy | Raikkolantie 145 • FI-32210 LOIMAA, FINLAND

Tel: +358 (0)20 1772 400 • E-mail: info@dinolift.com

Read more: www.dinolift.com

Technical specifications are subject to change without prior notice.

©Dinolift Oy | 17.4.2018