

260 MRT SERIES

MINI ROUGH TERRAIN SCISSOR LIFTS



Performance

| | | |
|----------------------------|---------------|----------|
| Platform Height-Elevated | 26 ft | 7.92 m |
| Platform Capacity | 1,250 lb | 567 kg |
| Capacity on Deck Extension | 300 lb | 136 kg |
| Lift/Lower Speed | 27/21 seconds | |
| Maximum Drive Height | Full Height | |
| Gross Vehicle Weight* | 7,360 lb | 3,338 kg |
| Drive Speed-Lowered | 3.5 mph | 5.6 km/h |
| Drive Speed-Elevated | 0.4 mph | 0.6 km/h |
| Gradeability | 35% | |
| Turning Radius (Inside) | 84 in. | 2.13 m |

* Certain options or country standards will increase weight.

Standard Specifications

Engine

| | | |
|-----------------------|----------|---------|
| Make and Model | | |
| Dual Fuel Kubota | 24.5 hp | 18.3 kW |
| Diesel Fuel Kubota | 23.5 hp | 17.5 kW |
| Fuel Tank Capacity | 7.5 gal. | 28.39 L |

Tires

| | |
|------------|---------------------|
| • Standard | 26 x 12 Lug Tread |
| • Optional | 26 x 12 Foam Filled |

Brakes

- Spring Applied Hydraulically Released

Hydraulic Reservoir

| | | |
|------------|---------|---------|
| • Capacity | 15 gal. | 56.78 L |
|------------|---------|---------|

Standard Features

| | |
|--|--|
| • 65 x 102 in. (1.65 x 2.59 m) Steel Platform | • Horn |
| • 4 ft (1.22 m) Manual Roll-Out Deck Extension | • Hourmeter |
| • Fold-Down Platform Rails | • Tilt Light and Alarm |
| • Moveable, Removable Platform Control Box | • Lubrication-Free Scissor Arm Bushings |
| • Cross Corner Four-wheel Drive | • Scissor Maintenance Prop |
| • Proportional Hydrostatic Drive Control with Thumb Steer | • Manual Descent Pull Cable |
| • Proportional Lift Up | • Heavy Gauge Steel Chassis Hoods |
| • 110V-AC Receptacle in Platform | • Nickel Plated Pins, Yellow Zinc-Chromate Plated Fasteners |
| | • All Motion Alarm |



Accessories & Options

- Leveling Jacks
- Platform Work Lights
- Full Swing-Gate
- 110V-AC Generator
- Flashing Amber Beacon
- 33.5 lb (19.73 kg) Propane Tank
- Hydraulic Leveling Jacks




260 MRT SERIES

MINI ROUGH TERRAIN SCISSOR LIFTS



Dimensions

All dimensions are approximate.

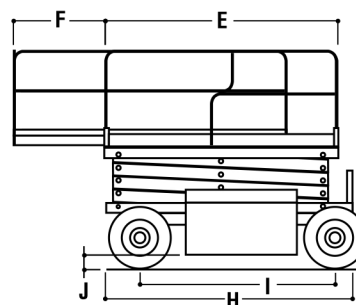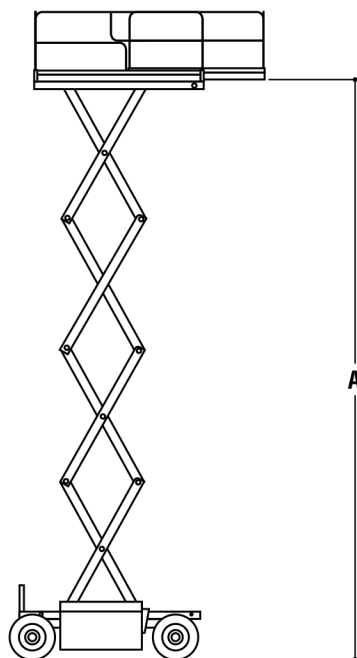

| | |
|-----------------------------|------------------------------|
| A. Platform Height Elevated | 26 ft (7.92 m) |
| B. Platform Height Lowered | 4 ft 1.5 in. (1.26 m) |
| C. Platform Railing Height | 3 ft 7.5 in. (1.1 m) |
| D. Overall Height | 7 ft 9.5 in. (2.37 m) |
| E. Platform Size | 65 x 102 in. (1.65 x 2.59 m) |
| F. Platform Extension | 4 ft (1.22 m) |

| | |
|--------------------------------------|---------------------|
| G. Overall Width | 5 ft 9 in. (1.75 m) |
| H. Overall Length (no outriggers) | 8 ft 9 in. (2.67 m) |
| I. Wheelbase | 6 ft 6 in. (1.98 m) |
| J. Ground Clearance | 8 in. (20 cm) |

The JLG "1 & 5" Warranty

JLG Industries, Inc. backs its products with its exclusive "1 & 5" Warranty. We provide coverage on all products for one (1) full year, and cover all specified major structural components for five (5) years. Due to continuous product improvements, we reserve the right to make specification and/or equipment changes without prior notification. This machine meets or exceeds applicable OSHA Regulations in 29 CFR 1910.67, 29 CFR 1926.453, ANSI A92.5-2006, and CSA Standard CAN3-B354.2-M82, as originally manufactured for intended applications.



Form No.: SS-260MRT-100-60M
Part No.: 3131404
R031410
Printed in USA



JLG Industries, Inc.
1 JLG Drive
McConnellsburg, PA 17233-9533
Telephone 717-485-5161
Toll-free in US 877-JLG-LIFT
Fax 717-485-6417
www.jlg.com

An Oshkosh Corporation Company